

SUCCESSFUL HOOK-UP OF THE SUPER ELITE SYSTEM

GRAY

HANDSET CONNECTION



IMPORTANT

If your telephone unplugs at the handset, follow Gray instructions.


If not, follow Gold instructions on reverse side.




SET UP




- 1a. Set switch on the side of the SUPER ELITE to the "OFF" (middle) position.
- 1b. Set Receive Volume Slide Control on the side approximately 1/3 up from the bottom position.

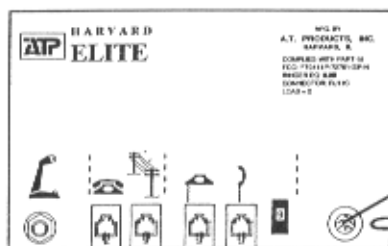

2. Plug Power Supply Module into the corresponding jack on the back of the SUPER ELITE.

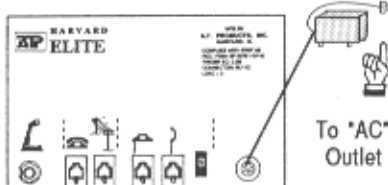


3. Plug Power Plug into a working "AC" electrical outlet.

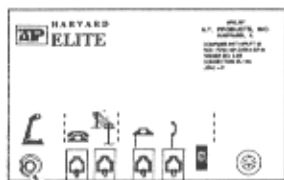

4. Plug Microphone(s) into Microphone Jack on the back of the SUPER ELITE.

FINAL HOOK UP

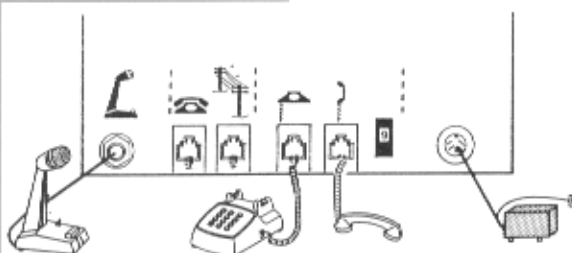


5. Hook up Telephone as shown, using black coil cord that was included with the unit.

OPERATION



1. Make your telephone call. (In this set-up, your telephone and all its features will operate as usual.)




2. When ready to switch to SUPER ELITE, set switch to right to "phone with handset off hook" position. Place handset on desk. DO NOT HANG UP HANDSET as this will disconnect the call.




3. Press Microphone Switch down and speak 12 to 18 inches away from, and directly into the front of the Microphone.



4. Start with switch set at "9". This switch adjusts the transmit level. If audio level is not adequate or clear, try another setting. (0 is the lowest, 9 is the highest.) If proper setting cannot be determined, call Customer Service for assistance.



5. Set Receive Volume Slide Control to desired audio level.



6. After completion of Telephone call, set Switch on the side of the SUPER ELITE to the "OFF" (middle) position.



7. Place Telephone Handset on cradle.


NOTE: Do not make both Gray and Gold Connections at the same time - use one or the other.




A.T. PRODUCTS, INC.
1600 S. Division St. • P.O. Box 625
Harvard, IL 60033 USA
815-943-3590 • Fax 815-943-3604

Teleconferencing Tip:
Keep Microphone away
from Loudspeaker.


QUESTIONS? Call
800-848-2205 or
815-943-3590

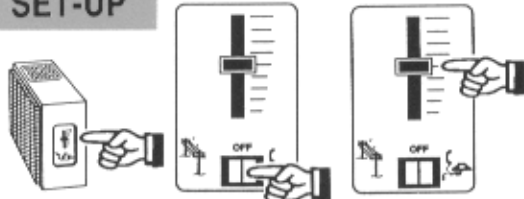GOLD**STOP READ OTHER SIDE FIRST****DIRECT TELEPHONE CONNECTION (SINGLE LINE)****SET-UP**


- 1a. Set Switch on the side of the SUPER ELITE to the "OFF" (middle) position.
- 1b. Set Receive Volume Slide Control on the side approximately 1/3 up from the bottom position.

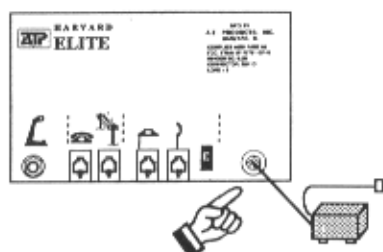


2. Plug Power Supply Module into the corresponding jack on the back of the SUPER ELITE.

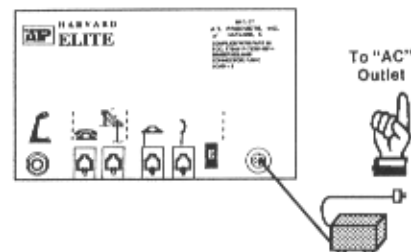


3. Plug Power Supply Module Power Cord into a working "AC" electrical outlet.

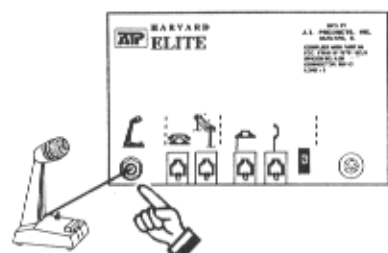


4. Plug Microphone(s) into Microphone Jack on the back of the SUPER ELITE.

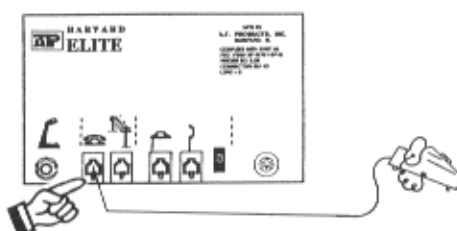

5. Plug the telephone cord coming from the telephone into the "phone" jack. If your unit has a dial pad, this step may be omitted.

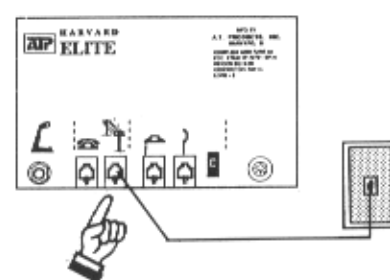


6. Plug the telephone wall jack cord into the "telephone pole" jack.

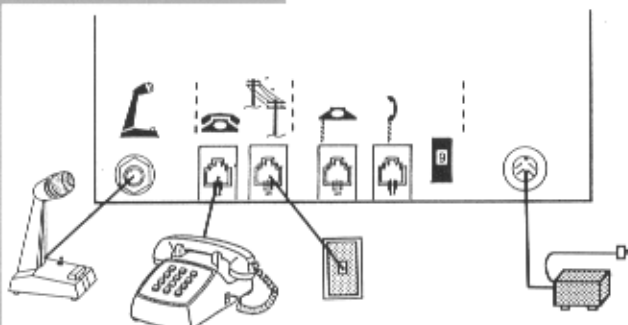FINAL HOOK-UP

(NOTE: If your unit has a dial pad, telephone is not necessary.)

OPERATION

1. Place a telephone call. If your unit has a dial pad, complete Step 2. before dialing.

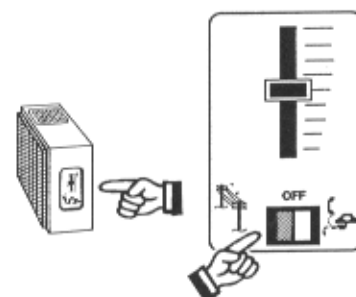


2. Set switch to left to "telephone pole" position. If your unit has a dial pad, dial now.




3. Place handset into telephone cradle (on hook). If your unit has a dial pad, this is not necessary.



4. Press drawbar down and speak 12 to 18 inches away from, and directly in front of the Microphone.

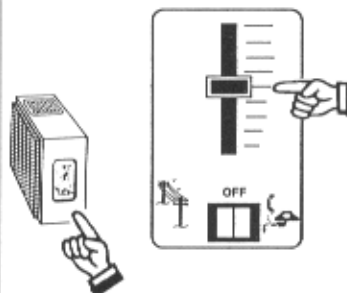

5. Set Receive Volume Slide Control to desired audio level.

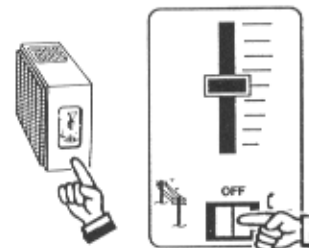

6. After completion of telephone call, disconnect phone line by setting switch to the "OFF" (middle) position.

NOTE: Do not make both Gray and Gold Connections at the same time - use one or the other.



A.T. PRODUCTS, INC.
1600 S. Division St. • P.O. Box 625
Harvard, IL 60033 USA
815-943-3590 • Fax 815-943-3604

Teleconferencing Tip:
Keep Microphone away
from Loudspeaker.

QUESTIONS? Call
800-848-2205 or
815-943-3590